




Description

Hostaphan® 2600N and 2660N polyester films are chemically primed for enhanced adhesion. They combine high strength and flexibility, good dimensional stability and excellent chemical resistance.

Performance

Hostaphan® 2600N and 2660N films have excellent slip and good dimensional stability over a wide temperature range. The primed surface provides enhanced adhesion to both aqueous and solvent based inks, coatings, adhesives and metallization. They can be coated or metallized to enhance barrier properties. These products are designed specifically for use in packaging applications. Hostaphan® 2600N and 2660N are not recommended for applications subject to severe retort conditions.

Schematic of Hostaphan® 2600N

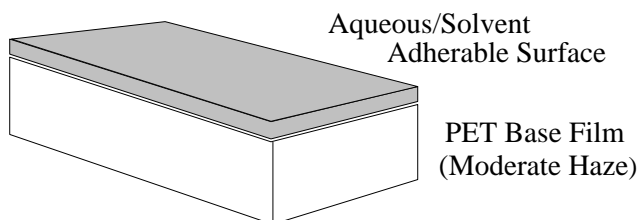

Benefits

- Available in one side primed (2600N) or two sides primed (2660N)
- Enhanced adhesion of both aqueous and solvent based inks, coatings and adhesives
- Significantly improved metal adhesion
- High surface energy provides excellent wet out for a variety of inks, coatings and adhesives
- Most inks, barrier coatings, adhesives and metallization may be applied to the chemically primed side without additional priming or corona treatment
- Excellent handling characteristics

FDA Status

The plain side of Hostaphan® 2600N can be used for direct food contact applications subject to limitations found in 21 CFR 177.1630 and in accordance with good manufacturing practices. The chemically primed surface of 2600N and both sides of 2660N can be used in direct contact with dry and fatty foods and with aqueous foods under low temperature conditions. Please contact your Mitsubishi Polyester Film Sales Representative for more information.

Typical Properties of Hostaphan® 2600N and 2660N Films

The Hostaphan® 2600N and 2660N property values below are typical measurements. Further guidance on series selection, functional behavior by end use, film processing, standard roll configuration and gauges is available through a Mitsubishi Polyester Film Sales Representative.

Property		Unit of Measure		Typical Value*	Test Method
Area Yield		in ² •mil/lb m ² •µm/kg		19,800 717	ASTM D 4321
Tensile Strength	MD	psi kg/cm ²		32,000 2,250	ASTM D 882
Yield Strength (F5)	MD	psi kg/cm ²		15,000 1,050	ASTM D 882
Ultimate Elongation	MD	%		100	ASTM D 882
Modulus	MD	psi kg/cm ²		600,000 42,200	ASTM D 882
Coefficient of Friction A/B	Static	--		0.40	ASTM D 1894
	Kinetic			0.37	
Shrinkage	MD	%		1.5	30 min. at 150°C
	TD			0.4	
Tear Strength	MD	g/mil		20	ASTM D 1922
		g/µm		0.8	
Moisture Vapor Transmission Rate		g /100 in ² •24 hr	48 gauge	3.7	ASTM E 96 , E
		g /m ² •24 hr		57	
Oxygen Transmission Rate		cc /100 in ² •24 hr•atm	48 gauge	9.1	ASTM D 3985
		cc /m ² •24hr•atm		141	
Density		g/cm ³		1.395	ASTM D 1505
Total Haze*		%	48 gauge	2.7	ASTM D-1003
			75 "	5.1	
			92 "	6.2	

* Values for reference data only. Contact a Mitsubishi Polyester Film Sales Representative for actual gauges available.



PO Box 1400 • Hood Road • Greer SC 29652 • 864-879-5000 • 864-879-5006 • www.m-petfilm.com

Hostaphan is a registered trademark of Hoechst AG and is licensed to Mitsubishi Polyester Film, Inc. The information contained herein is believed to be true and accurate, but all data, recommendations and suggestions are provided without guarantee, since the conditions of use are beyond our control and can affect the performance and properties of our products. The user is solely responsible for confirming that our product is suitable for the intended end use, and for compliance with all legal regulations and patents. Other than compliance with published Mitsubishi Polyester Film, Inc. specifications for one year following purchase, and except as required by law, MITSUBISHI POLYESTER FILM, INC. MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If a product is found to be defective during the warranty period, user's sole remedy and our sole obligation is, at our option, replacement of the affected product or refund of the purchase price. Except as required by law, we are not liable for any damage, harm or loss resulting from our product, whether direct, indirect, consequential, incidental or special, and irrespective of legal theory asserted, including strict liability, contract, warranty, or negligence.

©2000, 2008 Mitsubishi Polyester Film, Inc. All rights reserved.