

# 2RD6MN Moderate COF Film



PRODUCT BULLETIN

## Description

Hostaphan® 2RD6MN polyester film is similar to 2RD6N as it is chemically primed on one side for enhanced adhesion and offers moderate COF on one side. The film combines high strength and flexibility, good dimensional stability and excellent chemical resistance.

## Performance

Hostaphan® 2RD6MN films have good dimensional stability over a wide temperature range. The primed surface provides enhanced adhesion to solvent based inks, coatings, and adhesives, as well as vacuum deposited metal. 2RD4N and 2RD6N can be coated or metallized to enhance barrier properties.


## FDA Status

The plain side of 2RD6MN can be used for direct food contact applications subject to limitations found in 21 CFR 177.1630. The chemically primed side of 2RD6MN can be used in direct contact with dry foods and fatty foods and with aqueous foods under low temperature conditions. Other applications may require a functional barrier. For more information, contact your Mitsubishi Polyester Film Sales Representative.

## Benefits

- Copolyester coating on one side (2RD6MN)
- Most inks, barrier coatings, adhesives and metallization may be applied to the chemically primed side without additional priming or corona treatment
- Excellent handling characteristics
- Moderate COF Surface: 0.60 - 0.80
- Standard gauge: 48

## Schematic of Hostaphan® 2RD6MN

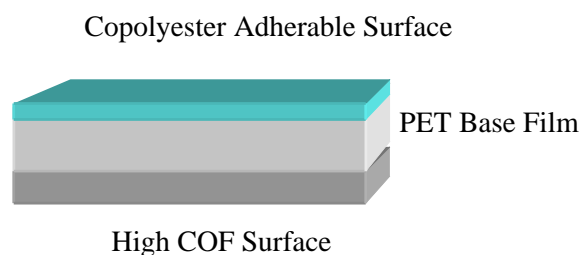

## Typical Properties of Hostaphan® 2RD6MN Film

The Hostaphan® 2RD6MN property values below are typical measurements. Further guidance on series selection, functional behavior by end use, film processing, standard roll configuration and gauges is available through a Mitsubishi Polyester Film Sales Representative.

Property		Unit of Measure		Typical Value	Test Method
Area Yield		in <sup>2</sup> •mil/lb m <sup>2</sup> •µm/kg		19,800 717	ASTM D 4321
Tensile Strength	MD	psi kg/cm <sup>2</sup>		32,000 2,250	ASTM D 882
Yield Strength (F5)	MD	psi kg/cm <sup>2</sup>		15,000 1,050	ASTM D 882
Ultimate Elongation	MD	%		100	ASTM D 882
Modulus	MD	psi kg/cm <sup>2</sup>		600,000 42,200	ASTM D 882
Coefficient of Friction A/B	Static Kinetic	--		0.40 0.37	ASTM D 1894
Coefficient of Friction A/A	Static Kinetic	--		0.60 - 0.80 0.60 - 0.80	ASTM D 1894
Shrinkage	MD TD	%		2.5 0.8	30 min. at 150°C
Tear Strength	MD	g/mil g/µm		20 0.8	ASTM D 1922
Moisture Vapor Transmission Rate		g /100 in <sup>2</sup> •24 hr g /m <sup>2</sup> •24 hr	48 ga.	3.7 57	ASTM E 96
Oxygen Transmission Rate		cc /100 in <sup>2</sup> •24 hr•atm cc /m <sup>2</sup> •24hr•atm	48 ga.	9.1 141	ASTM D 3985
Density		g/cm <sup>3</sup>		1.395	ASTM D 1505
Total Haze*		%	48 ga.	3.0	ASTM D-1003
Surface Energy			copolyester coated side	approx. 50	Internal test (contact angle)

\* Values for reference data only. Contact a Mitsubishi Polyester Film Sales Representative for actual gauges available.

Approved ZL12/08



PO Box 1400 • Hood Road • Greer SC 29652 • 864-879-5000 • 864-879-5006 • [www.m-petfilm.com](http://www.m-petfilm.com)

Hostaphan is a registered trademark of Hoechst AG and is licensed to Mitsubishi Polyester Film, Inc. The information contained herein is believed to be true and accurate, but all data, recommendations and suggestions are provided without guarantee, since the conditions of use are beyond our control and can affect the performance and properties of our products. The user is solely responsible for confirming that our product is suitable for the intended end use, and for compliance with all legal regulations and patents. Other than compliance with published Mitsubishi Polyester Film, Inc. specifications for one year following purchase, and except as required by law, MITSUBISHI POLYESTER FILM, INC. MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If a product is found to be defective during the warranty period, user's sole remedy and our sole obligation is, at our option, replacement of the affected product or refund of the purchase price. Except as required by law, we are not liable for any damage, harm or loss resulting from our product, whether direct, indirect, consequential, incidental or special, and irrespective of legal theory asserted, including strict liability, contract, warranty, or negligence.

©2000, 2008 Mitsubishi Polyester Film, Inc. All rights reserved.