

2SABN & 2SACN Silicone Adherable Films



PRODUCT BULLETIN

Description

Hostaphan® 2SABN and 2SACN polyester films are chemically treated to provide enhanced adhesion for silicone coatings. They combine high strength and durability, good dimensional stability and excellent chemical resistance.

Performance


Hostaphan® 2SABN and 2SACN films have been extensively evaluated by several silicone manufacturers and found to provide excellent results with all types of silicone systems. Solvent, solventless and emulsion systems from Dow Corning, GE Silicones, Wacker and Rhodia were evaluated using thermal, UV and E-beam curing methods with standard industry testing for rub-off, smear and migration. The silicone coatings were tested by various manufacturers, including Mitsubishi Polyester Film, and have demonstrated a significant improvement in anchorage performance.

Benefits

- Available in one side treated (2SABN) and two side treated (2SACN)
- Improves silicone adhesion
- Minimizes silicone rub-off
- Eliminates the need for priming or corona treatment
- Possesses a 50 - 55 dyne/cm surface energy
- Provides a more consistent release level with aging
- Good handling characteristics

Schematic of Hostaphan® 2SABN

Silicone Adherable Surface

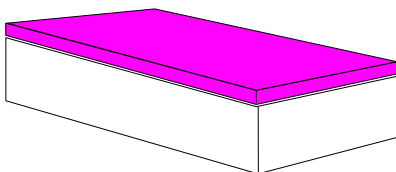

PET Base Film
(Moderate Haze)

Typical Properties of Hostaphan® 2SABN and 2SACN Film

The Hostaphan® 2SABN and 2SACN property values below are typical measurements. Further guidance on series selection, functional behavior by end use, film processing, standard roll configuration and gauges is available through a Mitsubishi Polyester Film Sales Representative.

Property		Unit of Measure	Typical Value	Test Method	
Area Yield		in ² •mil/lb m ² •µm/kg	19,800 717	ASTM D 4321	
Tensile Strength	MD	psi kg/cm ²	30,000 2,110	ASTM D 882	
Yield Strength (F5)	MD	psi kg/cm ²	15,000 1,050	ASTM D 882	
Ultimate Elongation	MD	%	150	ASTM D 882	
Modulus	MD	psi kg/cm ²	500,000 35,200	ASTM D 882	
Coefficient of Friction A/B	Kinetic	--	0.40	ASTM D 1894	
Shrinkage	MD TD	%	1.5 0.4	30 min. at 150°C	
Density		g/cm ³	1.395	ASTM D 1505	
Total Haze*		%	142 gauge 200 " 300 "	5.5 6.5 8.0	ASTM D-1003

* Values for reference data only. Contact a Mitsubishi Polyester Film Sales Representative for actual gauges available.

Approved TW 5/09



PO Box 1400 • Hood Road • Greer SC 29652 • 864-879-5000 • 864-879-5006 • www.m-petfilm.com

Hostaphan is a registered trademark of Hoechst AG and is licensed to Mitsubishi Polyester Film, Inc. The information contained herein is believed to be true and accurate, but all data, recommendations and suggestions are provided without guarantee, since the conditions of use are beyond our control and can affect the performance and properties of our products. The user is solely responsible for confirming that our product is suitable for the intended end use, and for compliance with all legal regulations and patents. Other than compliance with published Mitsubishi Polyester Film, Inc. specifications for one year following purchase, and except as required by law, MITSUBISHI POLYESTER FILM, INC. MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If a product is found to be defective during the warranty period, user's sole remedy and our sole obligation is, at our option, replacement of the affected product or refund of the purchase price. Except as required by law, we are not liable for any damage, harm or loss resulting from our product, whether direct, indirect, consequential, incidental or special, and irrespective of legal theory asserted, including strict liability, contract, warranty, or negligence.

©2000, 2008 Mitsubishi Polyester Film, Inc. All rights reserved.