


2261N Packaging Film

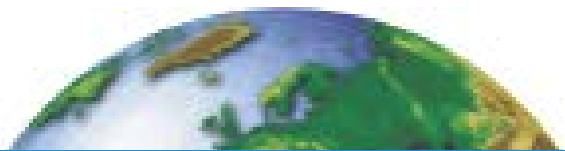

PRODUCT BULLETIN

Description

Hostaphan® 2261N is an untreated polyester film that combines high strength and durability, good dimensional stability and excellent chemical resistance.

Performance

Hostaphan® 2261N film has excellent slip and good dimensional stability over a wide temperature range. It can be *coated* or *metallized* to enhance barrier properties. This film can be used in a variety of printing and converting processes and packaging applications.


FDA Status

Hostaphan® 2261N can be used for direct food contact applications subject to limitations found in 21 CFR 177.1630 and in accordance with good manufacturing practices. Drug Master File information is available on request. Contact your Mitsubishi Polyester Film Sales Representative for additional information.

Benefits

- Can be coated or printed using methods suitable for plain polyester
- Excellent handling characteristics
- Available in special grade suitable for metallizing

Schematic of Hostaphan® 2261N

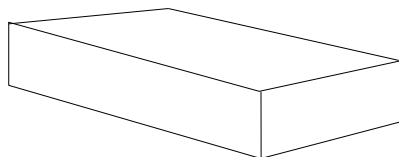

PET Base Film
(Moderate Haze)

Typical Properties of Hostaphan® 2261N Film

The Hostaphan® 2261N property values below are typical measurements. Further guidance on series selection, functional behavior by end use, film processing, standard roll configuration and gauges is available through a Mitsubishi Polyester Film Sales Representative.

Property		Unit of Measure	Typical Value*	Test Method
Area Yield		in ² •mil/lb m ² •µm/kg	19,800 717	ASTM D 4321
Tensile Strength	MD	psi kg/cm ²	32,000 2,250	ASTM D 882
Yield Strength (F5)	MD	psi kg/cm ²	15,000 1,050	ASTM D 882
Ultimate Elongation	MD	%	100	ASTM D 882
Modulus	MD	psi kg/cm ²	600,000 42,200	ASTM D 882
Coefficient of Friction A/B	Static Kinetic	--	0.40 0.37	ASTM D 1894
Shrinkage	MD TD	%	1.7 0.5	30 min. at 150°C
Tear Strength	MD	g/mil g/µm	20 0.8	ASTM D 1922
Moisture Vapor Transmission Rate		g /100 in ² •24 hr g /m ² •24 hr	48 gauge 3.7 57	ASTM E 96
Oxygen Transmission Rate		cc /100 in ² •24 hr•atm cc /m ² •24hr•atm	48 gauge 9.1 141	ASTM D 3985
Density		g/cm ³	1.3975	ASTM D 1505
Total Haze*		%	48 gauge 75 92 118 2.7 4.0 4.1 4.5	ASTM D-1003

* Values for reference data only. Contact a Mitsubishi Polyester Film Sales Representative for actual gauges available.

Approved AP 12/2017



PO Box 1400 • Hood Road • Greer SC 29652 • 864-879-5000 • 864-879-5006 • www.m-petfilm.com

Hostaphan is a registered trademark of Hoechst AG and is licensed to Mitsubishi Polyester Film, Inc. The information contained herein is believed to be true and accurate, but all data, recommendations and suggestions are provided without guarantee, since the conditions of use are beyond our control and can affect the performance and properties of our products. The user is solely responsible for confirming that our product is suitable for the intended end use, and for compliance with all legal regulations and patents. Other than compliance with published Mitsubishi Polyester Film, Inc. specifications for one year following purchase, and except as required by law, MITSUBISHI POLYESTER FILM, INC. MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If a product is found to be defective during the warranty period, user's sole remedy and our sole obligation is, at our option, replacement of the affected product or refund of the purchase price. Except as required by law, we are not liable for any damage, harm or loss resulting from our product, whether direct, indirect, consequential, incidental or special, and irrespective of legal theory asserted, including strict liability, contract, warranty, or negligence.

©2000 – 2008, 2017 Mitsubishi Polyester Film, Inc. All rights reserved.