

Mitsubishi Chemical America, Inc.

Description

Hostaphan® 2SABN and 2SACN polyester films are chemically treated to provide enhanced adhesion for silicone coatings. They combine high strength and durability, good dimensional stability, and excellent chemical resistance.


Performance

Hostaphan® 2SABN and 2SACN films have been extensively evaluated by several silicone manufacturers and found to provide excellent results with all types of silicone systems. Solvent, solventless and emulsion systems from Dow, GE Silicones, Wacker and Rhodia were evaluated using thermal, UV and E-beam curing methods with standard industry testing for rub-off, smear and migration. The silicone coatings were tested by various manufacturers, including Mitsubishi Chemical America, and have demonstrated a significant improvement in anchorage performance.

Benefits

- Available in one-side treated (2SABN) and two-side treated (2SACN)
- Improves silicone adhesion
- Minimizes silicone rub-off
- Eliminates the need for priming or corona treatment
- Possesses a 50 - 55 dyne/cm surface energy
- Provides a more consistent release level with aging
- Good handling characteristics

Schematic of Hostaphan® 2SABN

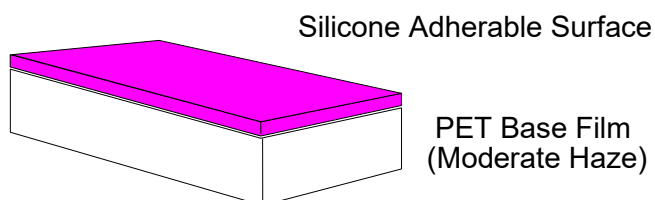

Typical Properties of Hostaphan® 2SABN and 2SACN Films

The Hostaphan® 2SABN and 2SACN property values below are typical measurements. Further guidance on series selection, functional behavior by end use, film processing, standard roll configuration and gauges is available through a Polyester Film Sales Representative.

Property		Unit of Measure	Typical Value	Test Method
Area Yield		in ² •mil/lb m ² •µm/kg	19,800 717	ASTM D 4321
Tensile Strength	MD	psi kg/cm ²	30,000 2,110	ASTM D 882
Yield Strength (F5)	MD	psi kg/cm ²	15,000 1,050	ASTM D 882
Ultimate Elongation	MD	%	100	ASTM D 882
Modulus	MD	psi kg/cm ²	500,000 35,200	ASTM D 882
Coefficient of Friction A/B	Kinetic	--	0.40	ASTM D 1894
Shrinkage	MD TD	%	1.5 0.4	30 min. at 150°C
Density		g/cm ³	1.395	ASTM D 1505
Total Haze*		%	200 gauge 6.5 300 " 8.0	ASTM D-1003

* Values for reference data only. Contact a Polyester Film Sales Representative for actual gauges available.
Approved RC 2/2021

Mitsubishi Chemical America, Inc. • PO Box 1400 • 2001 Hood Road • Greer, SC 29652 • 864-879-5000 • 864-879-5006 • www.m-petfilm.com

Hostaphan is a registered trademark of Hoechst AG and is licensed to Mitsubishi Chemical America, Inc. The information contained herein is believed to be true and accurate, but all data, recommendations and suggestions are provided without guarantee, since the conditions of use are beyond our control and can affect the performance and properties of our products. The user is solely responsible for confirming that our product is suitable for the intended end use, and for compliance with all legal regulations and patents. Other than compliance with published Mitsubishi Chemical America, Inc. specifications for one year following purchase, if properly handled, and except as required by law, MITSUBISHI CHEMICAL AMERICA, INC. MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If a product is found to be non-conforming during the warranty period, user's sole remedy and our sole obligation is, at our option, replacement of the affected product or refund of the purchase price. Except as required by law, we are not liable for any damage, harm or loss resulting from our product, whether direct, indirect, consequential, incidental or special, and irrespective of legal theory asserted, including strict liability, contract, warranty, or negligence.

©2000, 2008, 2021, 2022 Mitsubishi Chemical America, Inc. All rights reserved.