


## Description

Hostaphan® 4FOG is an ultra-clear polyester film that is chemically primed on both sides to eliminate fogging. It combines high strength and durability, optical clarity, and balanced shrinkage.

## Performance

Hostaphan® 4FOG is designed for markets requiring glass-like clarity and fog elimination. The chemical treatment also provides the slip necessary to handle and wind a smooth film. 4FOG is used in medical and dental face shield applications.

## Schematic of Hostaphan® 4FOG

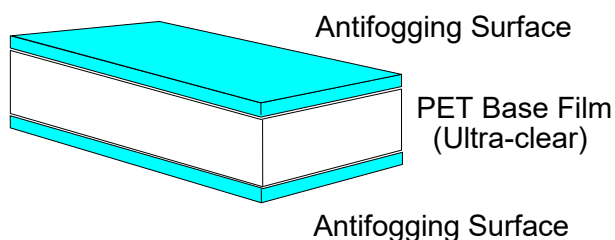

## Benefits

- Eliminates fogging
- Excellent color and clarity

## Special Warning

Hostaphan® 4FOG is an antifog polyester film intended for use in the manufacture of face shields for medical and dental applications. The product provides a physical barrier to non-corrosive fluids (e.g., bodily fluids) as encountered during medical and dental procedures. This film is not intended for use in the manufacture of impact resistant safety eyewear, industrial chemical face shields, or safety goggles. The 4FOG product does not provide significant impact resistance, or protection from corrosion and high temperature exposure (e.g., molten metals). Liquid contact with the 4FOG primed surfaces may reduce or eliminate the antifogging performance.

## Typical Properties of Hostaphan® 4FOG Film

The Hostaphan® 4FOG property values below are typical measurements. Further guidance on series selection, functional behavior by end use, film processing, standard roll configuration and gauges is available through a Polyester Film Sales Representative. The following values are not binding specifications and may vary.

Property		Unit of Measure	Typical Value	Test Method
Area Yield		in <sup>2</sup> •mil/lb m <sup>2</sup> •µm/kg	19,800 717	ASTM D 4321
Tensile Strength	MD	psi kg/cm <sup>2</sup>	30,000 2,110	ASTM D 882
Yield Strength (F5)	MD	psi kg/cm <sup>2</sup>	15,000 1,050	ASTM D 882
Ultimate Elongation	MD	%	150	ASTM D 882
Modulus	MD	psi kg/cm <sup>2</sup>	500,000 35,200	ASTM D 882
Coefficient of Friction (A/B)	Kinetic	--	0.40	ASTM D 1894
Shrinkage	MD TD	%	1.0 1.0	30 min. at 150°C
Density		g/cm <sup>3</sup>	1.395	ASTM D 1505
Fog Elimination		seconds	Fog Dissipation in < 3 seconds	Momentary contact with ambient pressure steam

\* Values for reference data only. Contact a Polyester Film Sales Representative for actual gauges.  
Approved KY 1/2021

Mitsubishi Chemical America, Inc. • PO Box 1400 • 2001 Hood Road • Greer, SC 29652 • 864-879-5000 • 864-879-5006 • [www.m-petfilm.com](http://www.m-petfilm.com)

Hostaphan is a registered trademark of Hoechst AG and is licensed to Mitsubishi Chemical America, Inc. The information contained herein is believed to be true and accurate, but all data, recommendations and suggestions are provided without guarantee, since the conditions of use are beyond our control and can affect the performance and properties of our products. The user is solely responsible for confirming that our product is suitable for the intended end use, and for compliance with all legal regulations and patents. Other than compliance with published Mitsubishi Chemical America, Inc. specifications for one year following purchase, if properly handled, and except as required by law, MITSUBISHI CHEMICAL AMERICA, INC. MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If a product is found to be non-conforming during the warranty period, user's sole remedy and our sole obligation is, at our option, replacement of the affected product or refund of the purchase price. Except as required by law, we are not liable for any damage, harm or loss resulting from our product, whether direct, indirect, consequential, incidental or special, and irrespective of legal theory asserted, including strict liability, contract, warranty, or negligence.

©2000-2008, 2013, 2021 Mitsubishi Chemical America, Inc. All rights reserved.