


Description

Hostaphan® 7000A Series ultra-clear polyester films are chemically modified on one side for handleability and improved adhesion to acrylic hard coatings. They combine high strength and durability, good dimensional stability, and excellent chemical resistance with very low haze.

Performance

Hostaphan® 7000A films are used in decorative and metallized products, solar control window, and other applications where surface smoothness and brilliance are required.

Schematic of Hostaphan® 7000A

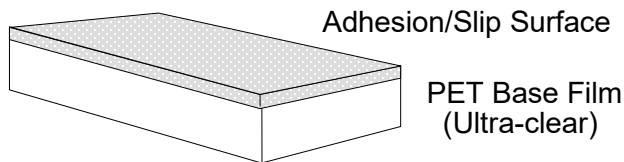

Benefits

- Excellent clarity and color
- Modified surface for improved slip
- Enhanced adhesion to scratch-resistant coatings
- 7211A - for applications that require dyeing
- 7333A - for sputter coating and vacuum metallizing

Typical Properties of Hostaphan® 7000A Film

The Hostaphan® 7000A property values below are typical measurements. Further guidance on series selection, functional behavior by end use, film processing, standard roll configuration and gauges is available through a Polyester Film Sales Representative.

Property		Unit of Measure	Typical Value	Test Method
Area Yield		ft ² /lb (m ² /kg)	48 gauge (12 µm)	286.5 (58.7)
			92 gauge (23 µm)	
Tensile Strength	MD	psi kg/cm ²	33,000 2,320	ASTM D 882
Yield Strength (F5)	MD	psi kg/cm ²	15,500 1,090	ASTM D 882
Ultimate Elongation	MD	%	115	ASTM D 882
Modulus	MD	psi kg/cm ²	550,000 38,700	ASTM D 882
Coefficient of Friction (A/B)	Static	--	0.40	ASTM D 1894
	Kinetic		0.30	
Shrinkage	MD	%	4.2	30 min. at 190°C
	TD		1.7	
Density		g/cm ³	1.395	ASTM D 1505
Total Haze*		%	48 gauge (12 µm)	0.9
			92 gauge (23 µm)	

* Values for reference data only. Contact a Polyester Film Sales Representative for actual gauges available.

Approved MG 5/2016

Mitsubishi Chemical America, Inc. • PO Box 1400 • 2001 Hood Road • Greer, SC 29652 • 864-879-5000 • 864-879-5006 • www.m-petfilm.com

Hostaphan is a registered trademark of Hoechst AG and is licensed to Mitsubishi Chemical America, Inc. The information contained herein is believed to be true and accurate, but all data, recommendations and suggestions are provided without guarantee, since the conditions of use are beyond our control and can affect the performance and properties of our products. The user is solely responsible for confirming that our product is suitable for the intended end use, and for compliance with all legal regulations and patents. Other than compliance with published Mitsubishi Chemical America, Inc. specifications for one year following purchase, if properly handled, and except as required by law, MITSUBISHI CHEMICAL AMERICA, INC. MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If a product is found to be non-conforming during the warranty period, user's sole remedy and our sole obligation is, at our option, replacement of the affected product or refund of the purchase price. Except as required by law, we are not liable for any damage, harm or loss resulting from our product, whether direct, indirect, consequential, incidental or special, and irrespective of legal theory asserted, including strict liability, contract, warranty, or negligence.

© 2000- 2012, 2016, 2021 Mitsubishi Chemical America, Inc. All rights reserved.