

Mitsubishi Chemical America, Inc.

Product Bulletin

Description

Hostaphan® 74SLK, 7BLK, and 7SLK are ultra-clear polyester films that are silicone treated on one side and slip treated on the other side to improve handleability. Along with high strength, flexibility, and chemical resistance, these products provide consistent release, excellent slip, and good dimensional stability over a wide temperature range.

Performance

Hostaphan® 74SLK, 7BLK, and 7SLK are used in decorative and metallized products, solar control and other applications where surface smoothness and brilliance are required. The silicone coating is specially applied prior to winding. This special treatment minimizes back-side transfer of the silicone to adhesives which may be in contact with the film. The slip modified surface provides excellent handling characteristics.

Benefits


- Heat shapeable
- Ultra-smooth surface
- Ultra-thin coatings
- Provides very consistent release properties with aging
- Excellent handling characteristics

Product Safety Information

WARNING

Silicone coated film is very slippery. Do not discard scrap film on the floor. Injury may result if stepped on.

Schematic of Hostaphan® 74SLK, 7BLK, 7SLK

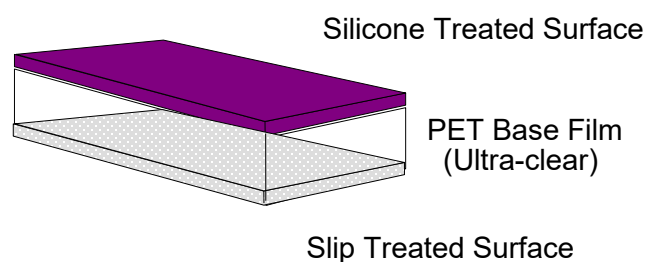

Typical Properties of Hostaphan® 74SLK, 7BLK, and 7SLK Films

The Hostaphan® 74SLK, 7BLK, and 7SLK property values below are typical measurements. Further guidance on series selection, functional behavior by end use, film processing, standard roll configuration and gauges is available through a Polyester Film Sales Representative.

Property		Unit of Measure	Typical Value	Test Method
Area Yield		ft ² /lb m ² /kg	23 µm (92 gauge) 149.5 30.6	ASTM D 4321
Tensile Strength	MD	psi kg/cm ²	31,000 2,180	ASTM D 882
Yield Strength (F5)	MD	psi kg/cm ²	15,000 1,050	ASTM D 882
Ultimate Elongation	MD	%	115	ASTM D 882
Modulus	MD	psi kg/cm ²	550,000 38,700	ASTM D 882
Coefficient of Friction (Si/Non-Si)	Kinetic	--	0.30	ASTM D 1894
Shrinkage	MD TD	%	2.1 0.0	30 min. at 150°C
Density		g/cm ³	1.395	ASTM D 1505
Total Haze*		%	23 µm (92 gauge) 1.0	ASTM D-1003

SILICONE FUNCTIONALITY

Recommended Release Film		7BLK 74SLK 7SLK	↑ Aggressiveness of Adhesive	
Re-adhesion	%	7SLK	> 95	Effect on tackiness of TESA 7475 tape to aluminum foil after contact with silicone coating
	%	74SLK	> 95	
	%	7BLK	> 95	

* Values for reference data only. Contact a Polyester Film Sales Representative for actual gauges available.
Approved MG 4/2016

Mitsubishi Chemical America, Inc. • PO Box 1400 • 2001 Hood Road • Greer, SC 29652 • 864-879-5000 • 864-879-5006 • www.m-petfilm.com

Hostaphan is a registered trademark of Hoechst AG and is licensed to Mitsubishi Chemical America, Inc. The information contained herein is believed to be true and accurate, but all data, recommendations and suggestions are provided without guarantee, since the conditions of use are beyond our control and can affect the performance and properties of our products. The user is solely responsible for confirming that our product is suitable for the intended end use, and for compliance with all legal regulations and patents. Other than compliance with published Mitsubishi Chemical America, Inc. specifications for one year following purchase, if properly handled, and except as required by law, MITSUBISHI CHEMICAL AMERICA, INC. MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If a product is found to be non-conforming during the warranty period, user's sole remedy and our sole obligation is, at our option, replacement of the affected product or refund of the purchase price. Except as required by law, we are not liable for any damage, harm or loss resulting from our product, whether direct, indirect, consequential, incidental or special, and irrespective of legal theory asserted, including strict liability, contract, warranty, or negligence.

©2000-2011, 2016, 2021, 2022 Mitsubishi Chemical America, Inc. All rights reserved.