


Description

Hostaphan® MTHLK polyester film is a single-side coated matte release film. Along with high strength, flexibility, and chemical resistance, this product provides excellent slip and good dimensional stability over a wide temperature range.

Performance

The release coating on Hostaphan® MTHLK has been designed for optimum easy release from typical solar control film pressure-sensitive adhesives.

Schematic of Hostaphan® MTHLK

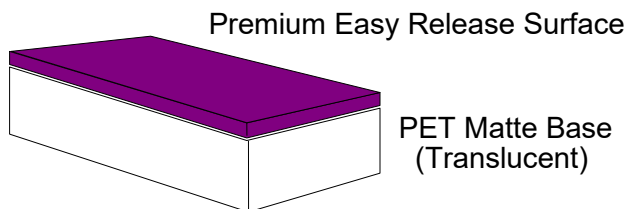

Benefits

- Excellent handling characteristics
- Clear distortion free coating
- Ultra-thin, highly cured coating which does not smear
- Matte surface opposite release surface aids in roll formation of laminates using soft facestocks
- Low static, suitable for solvent coating environment
- Provides very consistent release
- Better than 95% subsequent adhesion
- Excellent flatness

Typical Properties of Hostaphan® MTHLK Film

The Hostaphan® MTHLK property values below are typical measurements. Further guidance on series selection, functional behavior by end use, film processing, standard roll configuration and gauges is available through a Polyester Film Sales Representative.

Property		Unit of Measure	Typical Value	Test Method
Nominal Thickness*		gauge	142 200 350	ASTM E 252
Total Transmission		%	350 gauge 70	ASTM D 1003
60° Gloss		%	350 gauge 20-30	Gloss Meter
Area Yield		in ² / lb	92 gauge 21,524	ASTM D 4321
Tensile Strength	MD TD	psi psi	26,000 34,000	ASTM D 882
Modulus	MD TD	psi psi	450,000 470,000	ASTM D 882
Ultimate Elongation	MD TD	%	150 120	ASTM D 882
Shrinkage		MD TD	% 1.3 0.4	30 min. at 150°C
Density		g/cm ³	1.40	ASTM D 1505
Release		g/in	5.5	T-peel from laminate @ 20 in/min (non-aged)

* Values for reference data only. Contact a Polyester Film Sales Representative for actual gauges available.

Approved MG 6/2016

Mitsubishi Chemical America, Inc. • PO Box 1400 • 2001 Hood Road • Greer, SC 29652 • 864-879-5000 • 864-879-5006 • www.m-petfilm.com

Hostaphan is a registered trademark of Hoechst AG and is licensed to Mitsubishi Chemical America, Inc. The information contained herein is believed to be true and accurate, but all data, recommendations and suggestions are provided without guarantee, since the conditions of use are beyond our control and can affect the performance and properties of our products. The user is solely responsible for confirming that our product is suitable for the intended end use, and for compliance with all legal regulations and patents. Other than compliance with published Mitsubishi Chemical America, Inc. specifications for one year following purchase, if properly handled, and except as required by law, MITSUBISHI CHEMICAL AMERICA, INC. MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If a product is found to be non-conforming during the warranty period, user's sole remedy and our sole obligation is, at our option, replacement of the affected product or refund of the purchase price. Except as required by law, we are not liable for any damage, harm or loss resulting from our product, whether direct, indirect, consequential, incidental or special, and irrespective of legal theory asserted, including strict liability, contract, warranty, or negligence.

©2013, 2021 Mitsubishi Chemical America, Inc. All rights reserved.