




Hostaphan[®] RNK

Film with low haze

Hostaphan[®] RNK is a highly transparent, biaxially oriented coextruded film made of polyethylene terephthalate (PET).

Layer structure of Hostaphan[®] RNK

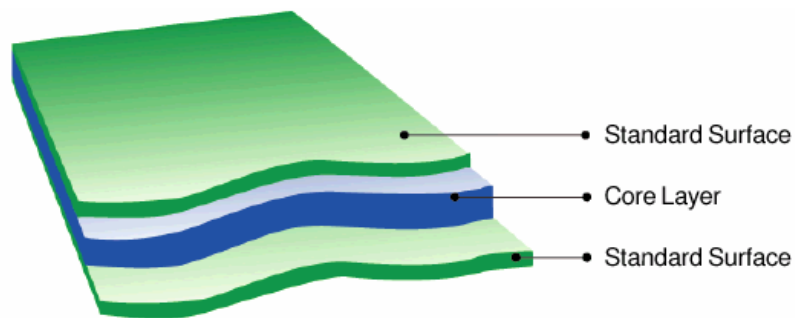

Typical properties

Property	Thickness μm	Units	Value		Test Method	Test Conditions
			MD*	TD*		
MECHANICAL						
Tensile strength	12-30 36 50-75	N/mm ²	260 260 185	260 280 270	ISO 527-1 and ISO 527-3 Sample type 2	Test speed 100 %/min.; 23 °C, 50 % r.h.
Elongation at break	12-23 30-36 50-75	%	110 140 200	100 125 120	ISO 527-1 and ISO 527-3 Sample type 2	Test speed 100 %/min.; 23 °C, 50 % r.h.
Young's Modulus	12-23 30-36 50-75	N/mm ²	4400 4500 4000	5000 5000 5500	ISO 527-1 and ISO 527-3 Sample type 2	Test speed 1 %/min.; 23 °C, 50 % r.h.
F5-value (stress to obtain 5% elongation)	12-75	N/mm ²	110	105	ISO 527-1 and ISO 527-3 Sample type 2	Test speed 100 %/min.; 23 °C, 50 % r.h.
THERMAL						
Shrinkage	12-23 30-75	%	1.4 1.0	0.2 0.2	DIN 40634	150°C, 15 min.
OPTICAL						
Transparency	12-75	%	90		ASTM-D 1003-61 method A	-



Property	Thickness	Units	Value		Test Method	Test Conditions
			MD*	TD*		
Haze	12-23	%		2	ASTM-D 1003-61 method A	Enlarged measurement angle
	30-36			3		
	50-75			4		
SURFACE						
Coefficient of friction (static)	12-75	-		0.4	DIN53375 or ASTM-D 1894	-
Surface tension	12-75	mN/m (dyne/cm)		43	DIN 53364	Test inks
PHYSICAL/CHEMICAL						
Density	12-75	g/cm ³		1.4	ASTM-D 1505-68 method C	23°C
Conductivity of aqueous extract	12-75	μS/cm		2.0	DIN 40634 or VDE 0345	1kHz
Water absorption	12-75	%		0.5	ASTM-D 570	4 days in water at 23°C
ELECTRICAL						
Permittivity	12-75	-		3.3	DIN 40634 or VDE 0345	23°C, 50 Hz 23°C, 1 kHz 23°C, 1 MHz 23°C, 240 MHz 23°C, 9300 MHz 150°C, 50 Hz
				3.3		
				3.2		
				2.9		
				2.9		
				3.6		
Dielectric strength	12	kV(kV/mm)		4.2 (350)	DIN 40634 or VDE 0345 in air	23°C, 50 Hz, rate of rise:500V/s Electrode diameters: Ball: 20 mm Plate: 50 mm Average voltage of 15 sheet samples
	19			6.0 (310)		
	23			6.8 (300)		
	30			8.3 (280)		
	36			9.5 (260)		
	50			11.0 (220)		
	75			13.0 (170)		
	Dielectric dissipation factor (tanδ)			12-75		
0.0052						
0.0210						
0.0060						
0.0060						
0.0048						
Volume resistivity	12-75	Ω x cm		> 10 ¹⁷	DIN 40634 or VDE 0345	23°C, DC 150°C, DC
				> 10 ¹¹		
Surface resistivity	12-75	Ω		> 5 x 10 ¹⁴	DIN 53482 or VDE 0303/part 3	23°C, 25% r.h. 23°C, 50% r.h. 150°C, 75% r.h.
				> 5 x 10 ¹⁴		
				> 10 ¹¹		



Property	Thickness	Units	Value		Test Method	Test Conditions
			MD*	TD*		
	μm					
BARRIER						
Air	12	$\text{cm}^3/\text{m}^2 \times \text{d} \times \text{bar}$	60		DIN 53380	23°C, 0% r.h.
Oxygen	12	$\text{cm}^3/\text{m}^2 \times \text{d} \times \text{bar}$	110		DIN 53380	23°C, 50% r.h.
Water vapour	12	$\text{g}/\text{m}^2 \times \text{d}$	16		DIN 53122	23°C, 85% r.h.
Nitrogen	12	$\text{cm}^3/\text{m}^2 \times \text{d} \times \text{bar}$	35		DIN 53380	23°C, 0% r.h.
Carbon dioxide	12	$\text{cm}^3/\text{m}^2 \times \text{d} \times \text{bar}$	500		DIN 53380	23°C, 0% r.h.

MD = Machine direction, TD = Transverse direction

Delivery program Hostaphan® RNK

Thickness	Thickness range	Yield		Roll length	Roll diameter	Roll length	Roll diameter
		g/m^2	m^2/kg				
μm	μm			m	mm	m	mm
12	± 0.5	17	60	24 000	650	48 000	900
15	± 0.5	21	48	11 200	490	33 600	830
19	± 0.8	27	38	9 200	500	18 400	700
23	± 1.0	32	31	9 600	550	19 200	800
30	± 1.5	42	24	9 360	630	15 600	800
36	± 2.0	50	20	8 000	635	12 000	770
50	± 2.0	70	14	6 400	670	9 600	810
75	± 3.5	110	9.6	4 000	650	6 000	790

Other roll lengths on request. Core diameter: 152.4 mm (6")

Hostaphan® RNK is suitable for a wide range of applications for packaging and industrial uses.

Hostaphan® RNK is also available with corona treatment (12-23 μm only) or chemically treated for improved adhesion of evaporated metal layers, printing inks or coatings (12-75 μm). Please refer to the data sheets of Hostaphan® RNK C, RNK 2600, RNK 260C, RNK 2CSR and RNK 2DEF.

Hostaphan® RNK is permitted for food contact according to the current version of EC Directive 2002/72/EC and FDA regulation 21 CFR 177.1630 under the conditions set out in our current Declaration of Compliance. Before using Hostaphan® RNK in a food contact article, please request this Declaration of Compliance.

This data sheet reflects our state of knowledge at the time this was prepared. The purpose is to provide an overview of the characteristics of our products and their potential uses. It neither guarantees specific properties nor the suitability of products in specific applications. The user must observe industrial property rights, such as patents or trademarks. The quality of our products is covered by the terms of the General Conditions of Sale of MITSUBISHI POLYESTER FILM GmbH.