

Mitsubishi Chemical America, Inc.


## Description

Hostaphan® 2602N polyester film is chemically primed for enhanced adhesion. It combines high strength and flexibility, good dimensional stability, and excellent chemical resistance.

## Performance

Hostaphan® 2602N film has excellent slip and good dimensional stability over a wide temperature range. The primed surface provides enhanced adhesion to both aqueous and solvent based inks, coatings, adhesives, and metallization. It can be coated or metallized to enhance barrier properties. This product is designed specifically for use in packaging applications. Hostaphan® 2602N is not recommended for applications subject to severe retort conditions.

## Schematic of Hostaphan® 2602N

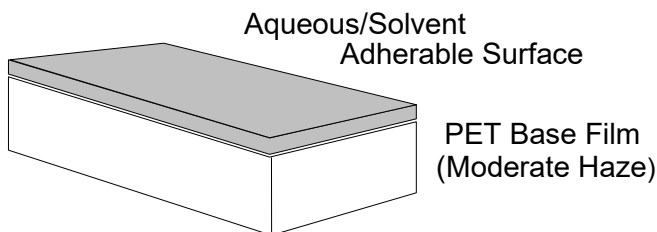

## Benefits

- Available in one side primed
- Enhanced adhesion of both aqueous and solvent based inks, coatings, and adhesives
- Significantly improved metal adhesion
- High surface energy provides excellent wet out for a variety of inks, coatings, and adhesives
- Most inks, barrier coatings, adhesives and metallization may be applied to the chemically primed side without additional priming or corona treatment
- Excellent handling characteristics

## FDA Status

The plain side of Hostaphan® 2602N can be used for direct food contact applications subject to limitations found in 21 CFR 177.1630 and in accordance with good manufacturing practices. The chemically primed surface of 2602N can be used in direct contact with dry and fatty foods and with aqueous foods under low temperature conditions. Please contact a Polyester Film Sales Representative for more information.

## Typical Properties of Hostaphan® 2602N Film

The Hostaphan® 2602N property values below are typical measurements. Further guidance on series selection, functional behavior by end use, film processing, standard roll configuration and gauges is available through a Polyester Film Sales Representative.

Property		Unit of Measure	Typical Value*	Test Method	
Area Yield		in <sup>2</sup> •mil/lb m <sup>2</sup> •µm/kg	19,800 717	ASTM D 4321	
Tensile Strength	MD	psi kg/cm <sup>2</sup>	32,000 2,250	ASTM D 882	
Yield Strength (F5)	MD	psi kg/cm <sup>2</sup>	15,000 1,050	ASTM D 882	
Ultimate Elongation	MD TD	%	100 90	ASTM D 882	
Modulus	MD	psi kg/cm <sup>2</sup>	600,000 42,200	ASTM D 882	
Coefficient of Friction A/B	Static Kinetic	--	0.40 0.37	ASTM D 1894	
Shrinkage	MD TD	%	1.9 0.4	30 min. at 150°C	
Tear Strength	MD	g/mil g/µm	20 0.8	ASTM D 1922	
Moisture Vapor Transmission Rate		g /100 in <sup>2</sup> •24 hr g /m <sup>2</sup> •24 hr	48 gauge 3.7 57	ASTM E 96, E	
Oxygen Transmission Rate		cc /100 in <sup>2</sup> •24 hr•atm cc /m <sup>2</sup> •24hr•atm	48 gauge 9.1 141	ASTM D 3985	
Density		g/cm <sup>3</sup>	1.395	ASTM D 1505	
Total Haze*		%	48 gauge 75 " 92 " 142 "	2.7 3.5 3.9 5.7	ASTM D-1003

\* Values for reference data only. Contact a Polyester Film Sales Representative for actual gauges available.  
Approved KL 3/2024

Mitsubishi Chemical America, Inc. • PO Box 1400 • 2001 Hood Road • Greer, SC 29652 • 864-879-5000 • 864-879-5006 • [www.m-petfilm.com](http://www.m-petfilm.com)

Hostaphan is a registered trademark of Hoechst AG and is licensed to Mitsubishi Chemical America, Inc. The information contained herein is believed to be true and accurate, but all data, recommendations and suggestions are provided without guarantee, since the conditions of use are beyond our control and can affect the performance and properties of our products. The user is solely responsible for confirming that our product is suitable for the intended end use, and for compliance with all legal regulations and patents. Other than compliance with published Mitsubishi Chemical America, Inc. specifications for one year following purchase, if properly handled, and except as required by law, MITSUBISHI CHEMICAL AMERICA, INC. MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If a product is found to be non-conforming during the warranty period, user's sole remedy and our sole obligation is, at our option, replacement of the affected product or refund of the purchase price. Except as required by law, we are not liable for any damage, harm or loss resulting from our product, whether direct, indirect, consequential, incidental or special, and irrespective of legal theory asserted, including strict liability, contract, warranty, or negligence.

©2000 – 2008, 2017, 2021, 2022, 2024 Mitsubishi Chemical America, Inc. All rights reserved.